

# SAC15 VA

› Intel® 7th Gen. Core™ i5-7300U / Pentium® 4415U Processor Fanless and All-around IP66 / IP69K Stainless 15" Panel PC



## Features



- Intel® 7th Gen. Core™ i5-7300U / Pentium® 4415U processor on board
- Fanless and quiet design
- Stainless steel SUS304 / SUS316
- All-around IP66 / IP69K mechanical design
- M12 waterproof connectors
- Supports 5-wire resistive touchscreen or projected capacitive touchscreen

## Specifications



### System

CPU Type	Intel® 7th Gen. Core™ i5-7300U processor Intel® Pentium® 4415U processor
Chipset	Intel® SoC
Memory Support	1 x DDR4 2133MHz SO-DIMM socket (up to 16G) (non-ECC)
Enclosure	Stainless SUS304/SUS316
IP Rating	IP66/IP69K
Power Input	DC In 12V/24V
Watchdog	1~255 second watchdog timer selectable
Operating System	Windows 10 IoT LTSB 2016 / Ubuntu 16.04
Dimensions	420 x 335 x 70 mm (W x H x D)
System Weight	7.5 kg
Mounting Support	Wall mount / VESA 100 / Stand / Table
Certifications	FCC / CE

### Display

LCD	15" TFT LCD (LED) resolution XGA 1024 x 768
Touchscreen	5-wire resistive touchscreen or projected capacitive touchscreen (USB interface)

### Applications

- Automation
- Food Service
- Information


### I/O Ports

Power Input	1 x M12 waterproof connector, supporting 12V/24V DC
USB	2 x USB 2.0 with M12 waterproof connector
Serial Port	1 x COM port with M12 waterproof connector COM 1 for RS-232/422/485
LAN	2 x GbE LANs with M12 waterproof connector Supports Wake-On-LAN
Storage	1 x 2.5" SATA III HDD or SSD
Expansion Slot	1 x full-sized Mini PCIe slot (Mini PCIe and USB signal)


### Environment

Operating Temp.	HDD: 0°C~40°C (32°F~104°F) (Ambient with airflow) SSD: 0°C~50°C (32°F~122°F)
Storage Temp.	-20°C~80°C (-4°F~176°F)
Humidity	20%~90%


## Highlights

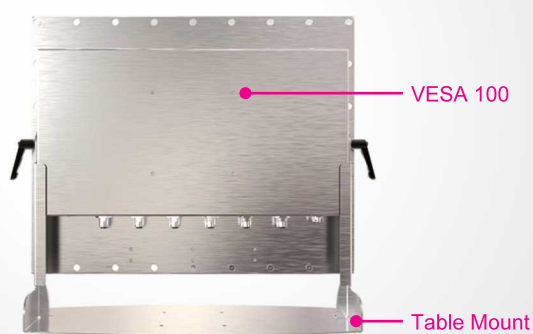

## I/O Panel View

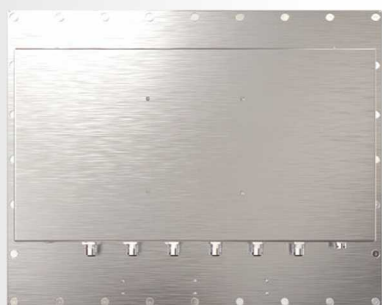

## Dimensions

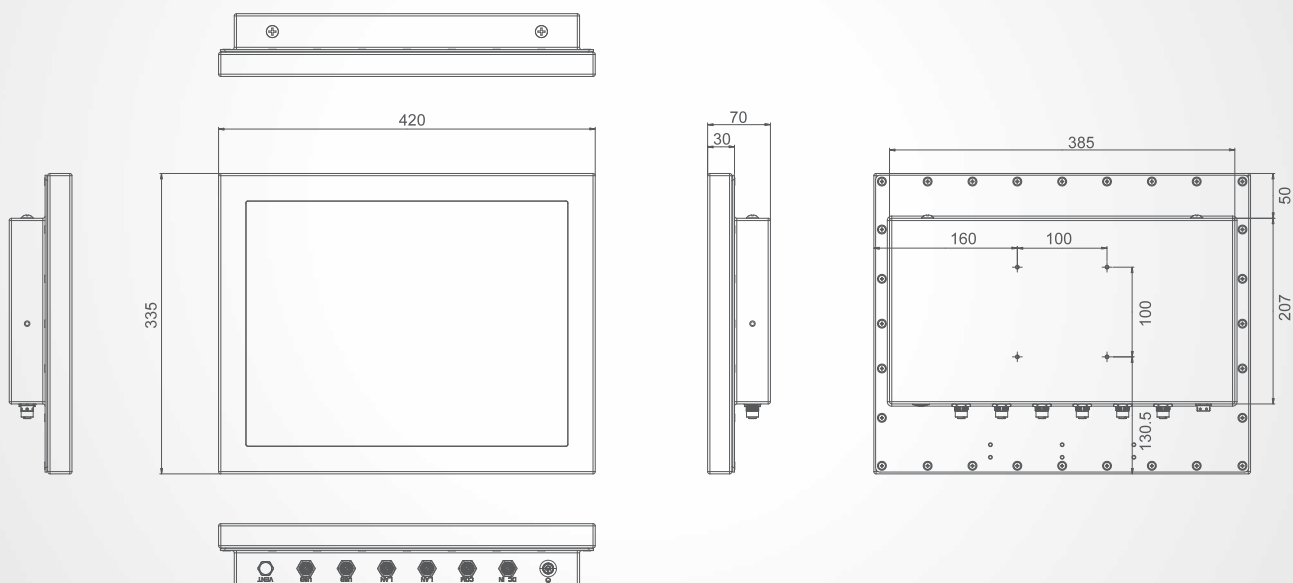

unit: mm